


- 1 Truss/Column Notch**  
Trusses are set into a notch cut into support posts to maximize load-carrying and uplift capability. Trusses are ledgerlocked to the columns.
- 2 Roof Trusses**  
Engineered to meet snow and/or wind loads of each individual building. Double trusses used for interior spans.
- 3 Door Headers**  
All overhead or sliding doors are spanned with either a header or a prefabricated roof truss.
- 4 Siding/Roofing Panels**  
Minimum 29 gauge, grade E panels. Will support 236 pounds per square foot on a 24" span.

- 5 Truss Bracing**  
Lateral and X Braces to maximize load carrying capabilities.
- 6 Dimensions**  
Building dimension is measured from outside of corner to outside of corner posts.
- 7 Columns**  
Grade stamped posts, pressure preservative treated to UC-4B for structural in-ground use.
- 8 Doors**  
Sliding or overhead doors are placed to allow for most functional use of the inside of your building.

- 12 Windows**  
Any size, dual glazed white or almond vinyl, custom manufactured with integrated J trim. Choice of window styles. Low-E, gas filled and tempered available.
- 13 Walk Door**  
Standard 3' width by 6'8" tall insulated steel skinned. Weather sealed all sides, with keyed exterior lockset and custom trim. Wider sizes and upgrades available.

- 14 Wall Girts**  
Spaced appropriately to support wind loads being applied to the walls and to provide area for screw fasteners.
- 15 Skirt Boards**  
2 x material pressure treated skirt boards keep sidewall metal from ground contact, protect against rot and decay and function as concrete forms for pouring floor as well.
- 16 Screw Fasteners**  
Powder coated, color matched 1 1/2" length are standard for attaching wall and roof steel.

**Option 1  
Premier Double  
Truss System**

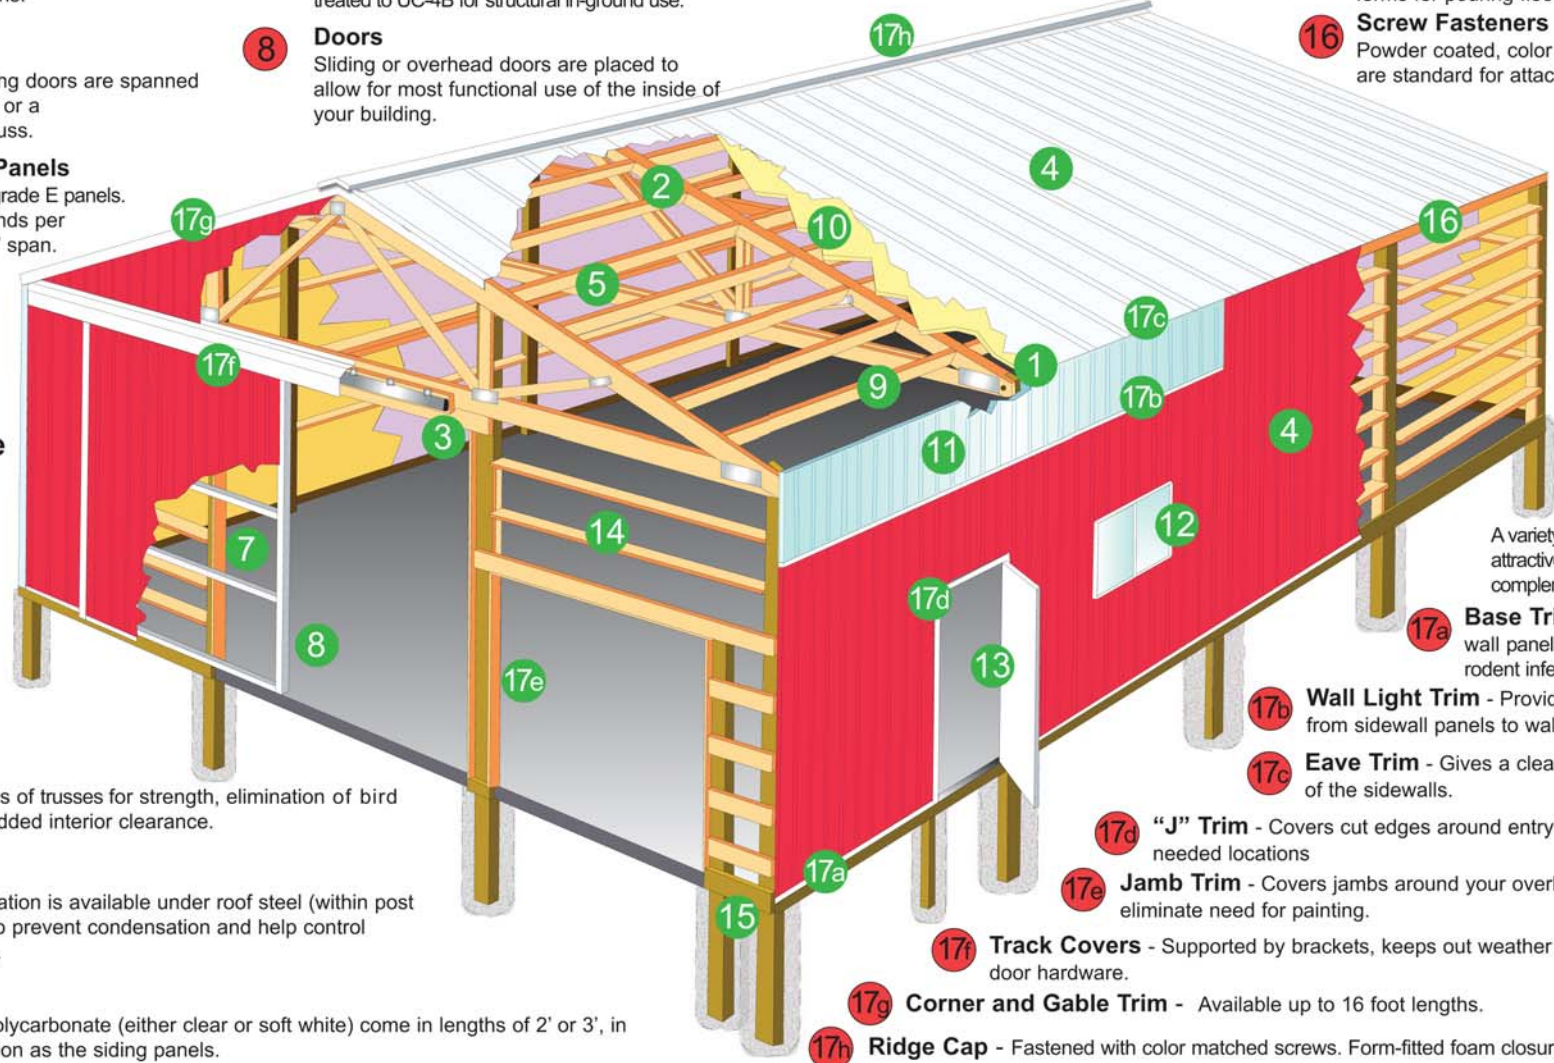

- 9 Roof Purlins**  
Joist hung from sides of trusses for strength, elimination of bird nesting areas and added interior clearance.
- 10 Roof Insulation**  
Reflective roof insulation is available under roof steel (within post column perimeter) to prevent condensation and help control interior temperature.
- 11 Eavelights**  
Translucent white polycarbonate (either clear or soft white) come in lengths of 2' or 3', in the same configuration as the siding panels.

**Building Trims**

- A variety of colors provides an attractive matching or contrasting complement to your building.
- 17a Base Trim** - Seals bottom of wall panels to prevent insect or rodent infestation.
  - 17b Wall Light Trim** - Provides a smooth transition from sidewall panels to wall lights.
  - 17c Eave Trim** - Gives a clean finished look at top of the sidewalls.
  - 17d "J" Trim** - Covers cut edges around entry doors and other as needed locations
  - 17e Jamb Trim** - Covers jambs around your overhead door opening to eliminate need for painting.
  - 17f Track Covers** - Supported by brackets, keeps out weather and protects door hardware.
  - 17g Corner and Gable Trim** - Available up to 16 foot lengths.
  - 17h Ridge Cap** - Fastened with color matched screws. Form-fitted foam closures keep weather out.